

S 61/260 and TC 61/280 -50 to 280 °C (FOR A SHORT TIME 300 °C), STICK-IN TEMPERATURE PROBE

S03.04en



DESCRIPTION AND APPLICATION

These resistance and thermocouple temperature probe S 61/200 and TC 61/280 are designed for the measurement of temperature of loose materials and solid substances, consistency of which is such so the metal tip cannot be damaged. They can be used also for measuring liquid and gaseous substances. The temperature range for the use of the probe is -50 to 280 °C. The sensors consist of a metal tip (stainless steel DIN 1.4301), a handle and a lead-in cable. Material composition of the probe conforms to the requirements of Decree 38/2001 Coll. as amended. The design allows easy cleaning, thanks to which the temperature probe can be used in the food industry. The resistance sensing element is located in the tip of the stainless steel case.

The probes are intended for operation in chemically non-aggressive environment.

DECLARATION, CERTIFICATES, CALIBRATION

Manufacturer provides **EU Declaration of Conformity**.


Calibration – The final metrological inspection – comparison with standards or working instruments – is carried out for all the products. Continuity of the standards and working measuring instruments is ensured within the meaning of the Section 5 of Act no.505/1990 on metrology. The manufacturer offers a possibility to supply the sensors calibrated in SENSIT s.r.o.'s laboratory (according to requirements of the EN ISO/IEC 17025 standard) or in an Accredited laboratory.

SPECIFICATIONS

Probe type	S 61/260	TC 61/280
Measuring range	-50 to 260 °C (for a short time 300 °C)	-40 to 280 °C (for a short time 300 °C)
Type of sensing element	all types	TC K
Nr. of measuring points	up to 3 measuring points (Pt)	up to 6 measuring points (TC K)
Ingress protection	IP 68 (1 bar) in accordance with EN 60529, as amended	
Material of the probe tip	stainless steel DIN 1.4301	
Diameter of the probe tip	4 mm - standard, 1.5 to 6 mm - modification	
Length of the probe tip	125 mm - standard, 50 to 500 mm - modification	
End of the probe tip	sharp - standard, bevelled, round, flat	
Material of the handle	teflon D14/57 mm or D11/57 mm	
Temperature resistance of the handle	up to 260 °C	
Lead-in cable	teflon shielded	teflon shielded or unshielded

Note: Certain technical specifications of thermocouple sensors (lead wires, IP rating, etc.) may differ with different types.


DIMENSIONAL DRAFT

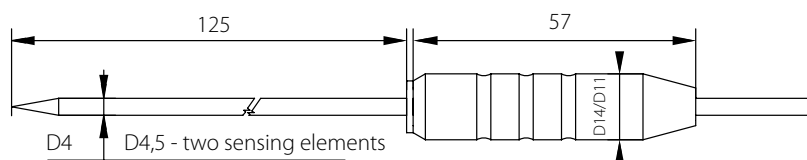


UP TO
6 MEASURING
POINTS

WIRING DIAGRAM


Two-wire



1x TC (up to 6x TC)



Three-wire



Four-wire

