

STHC 104 – TEMPERATURE, RELATIVE HUMIDITY AND CO₂ SENSOR TO THE INTERIOR WITH CAN OUTPUT PROTOCOL (CANOPEN)

H04.02en

DESCRIPTION AND APPLICATION

The STHC 104 temperature, relative humidity and CO₂ sensor is designed to measure the carbon dioxide concentration, temperature and relative humidity of the air in spaces protected against water.

This combined sensor consists of a plastic ribbing head where a printed circuit board with the individual sensors and a converter is placed to establish a communication via the CAN bus. The temperature and relative humidity are measured by a common internal sensor whose signal is processed in a microprocessor and is converted to a CANopen output signal with CiA DS 301 specification. The CO₂ value is measured by a NDIR module whose digital signal is also converted to CANopen output signal with CiA DS 301 specification. For the CO₂ concentration sensor, there is an autocalibration function available to set the sensor at the minimum CO₂ value corresponding to the outside concentration level.

The STHC 104 temperature, relative humidity and CO₂ sensor meets the ingress protection of IP 30 according to EN 60529, as amended. Suitable design and high-quality material ensure that the sensor does not feel disturbing even in the interiors with high aesthetic requirements. The STHC 104 temperature, relative humidity and CO₂ sensor is designed to be operated in a chemically non-aggressive environment; its use must be chosen with regard to temperature and chemical resistance of the head and of the individual sensors.

The operating conditions to establish the correct function are:

- ambient temperature in the vicinity of the sensor: 0 to 45 °C
- relative ambient humidity: 0 to 95% (non-condensing humidity)
- atmospheric pressure: 87 to 106 kPa

DECLARATION, CERTIFICATES, CALIBRATION

Manufacturer provides **EU Declaration of Conformity**.

Calibration – The final metrological inspection – comparison with standards or working instruments – is carried out for all the products. Continuity of the standards and working measuring instruments is ensured within the meaning of the Section 5 of Act no.505/1990 on metrology. The manufacturer offers a possibility to supply the sensors calibrated in SENSIT s.r.o.'s laboratory (according to requirements of the EN ISO/IEC 17025 standard) or in an Accredited laboratory.

SPECIFICATIONS

Sensor type	STHC 104
Temperature measurement range **	0 to 45 °C
Temperature measurement accuracy *	± 0.5 °C
Relative humidity measurement range *	0 to 85 %
Relative humidity measurement accuracy *	± 3 % in range 10 to 85 % ± 4.5 % in range 0 to 10 %
CO ₂ measuring range *	400 to 5000 ppm
CO ₂ measuring accuracy *	± 100 ppm *
Time response CO ₂ (90%)	90 s
Output signal	CAN / CANopen - CiA DS 301
Galvanically separated	no, possible on request
Supply voltage U	15 to 30 VDC
Rated supply voltage Un	24 VDC
Consumption	maximum: 500 mW typical: 300 mW
Ingress protection	IP 30 acc. to EN 60529, as amended
Dimension of the head	71.9 x 59 x 27 mm



OTHER PARAMETERS


Material of the head	LEXAN
Weight	min 35 g
Recommended wire cross section	0.14 to 1 mm ²

* The stated measurement ranges and accuracies for the individual sensors refer to operating conditions when the supply voltage is connected.

**Temperature sensor can be used in temperature range -40 to 80 °C for a short time.

WIRING DIAGRAM

RS 485

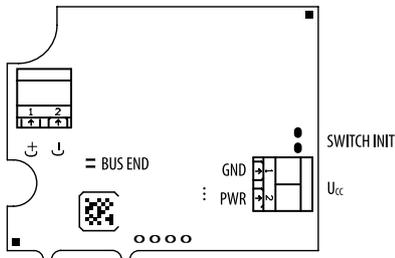

GND, PWR – Ucc supply voltage
C+/C- – communication line

DIMENSIONAL DRAFT

